

STONE LOOK

Mystone Limestone



MARAZZI



Mystone Limestone

Limestone takes shape in Mystone Limestone through soft surfaces, light veining and natural elegance. In stone-effect porcelain stoneware, it comes in Sand, Ivory and Taupe and in 60x60, 30x60, 60x120, 75x75, 120x120, 75x150 and 160x160 sizes. Mosaics add rhythm, delicate reflections and a more vibrant texture across the collection. StepWise and Tecnico improve grip, cleaning and performance from indoor areas to outdoor spaces, with a 20 mm outdoor option.

MQLV Mystone Limestone Ivory R10 Rt 160x160cm
MQ7Y Lume Bone Lux 10x10cm
M7FK Mystone Limestone20 Ivory Strutturato Rettificato 80x80cm



M9HE Limestone Ivory Rt 6Mm 60x120cm
M9HA Limestone Ivory Rt 6Mm 120x120cm
M96W Rice Blu Decoro Leaf Lux 5x15cm
M96R Rice Blu Lux 5x15cm



M9HC Limestone Sand Rt 6Mm 120x120cm



M9HC Limestone Sand Rt 6Mm 120x120cm



M9HF Limestone Sand Rt 6Mm 60x120cm
M9HC Limestone Sand Rt 6Mm 120x120cm




M5V1 Magnifica Limestone Sand Str Mikado 60x180cm
M5U6 Magnifica Limestone Sand 60x180cm

M7E2 Limestone Sand Rt 75x150cm
M7AW Vero Quercia Rt 22x180cm



M7E1 Limestone Taupe Rt 75x150cm

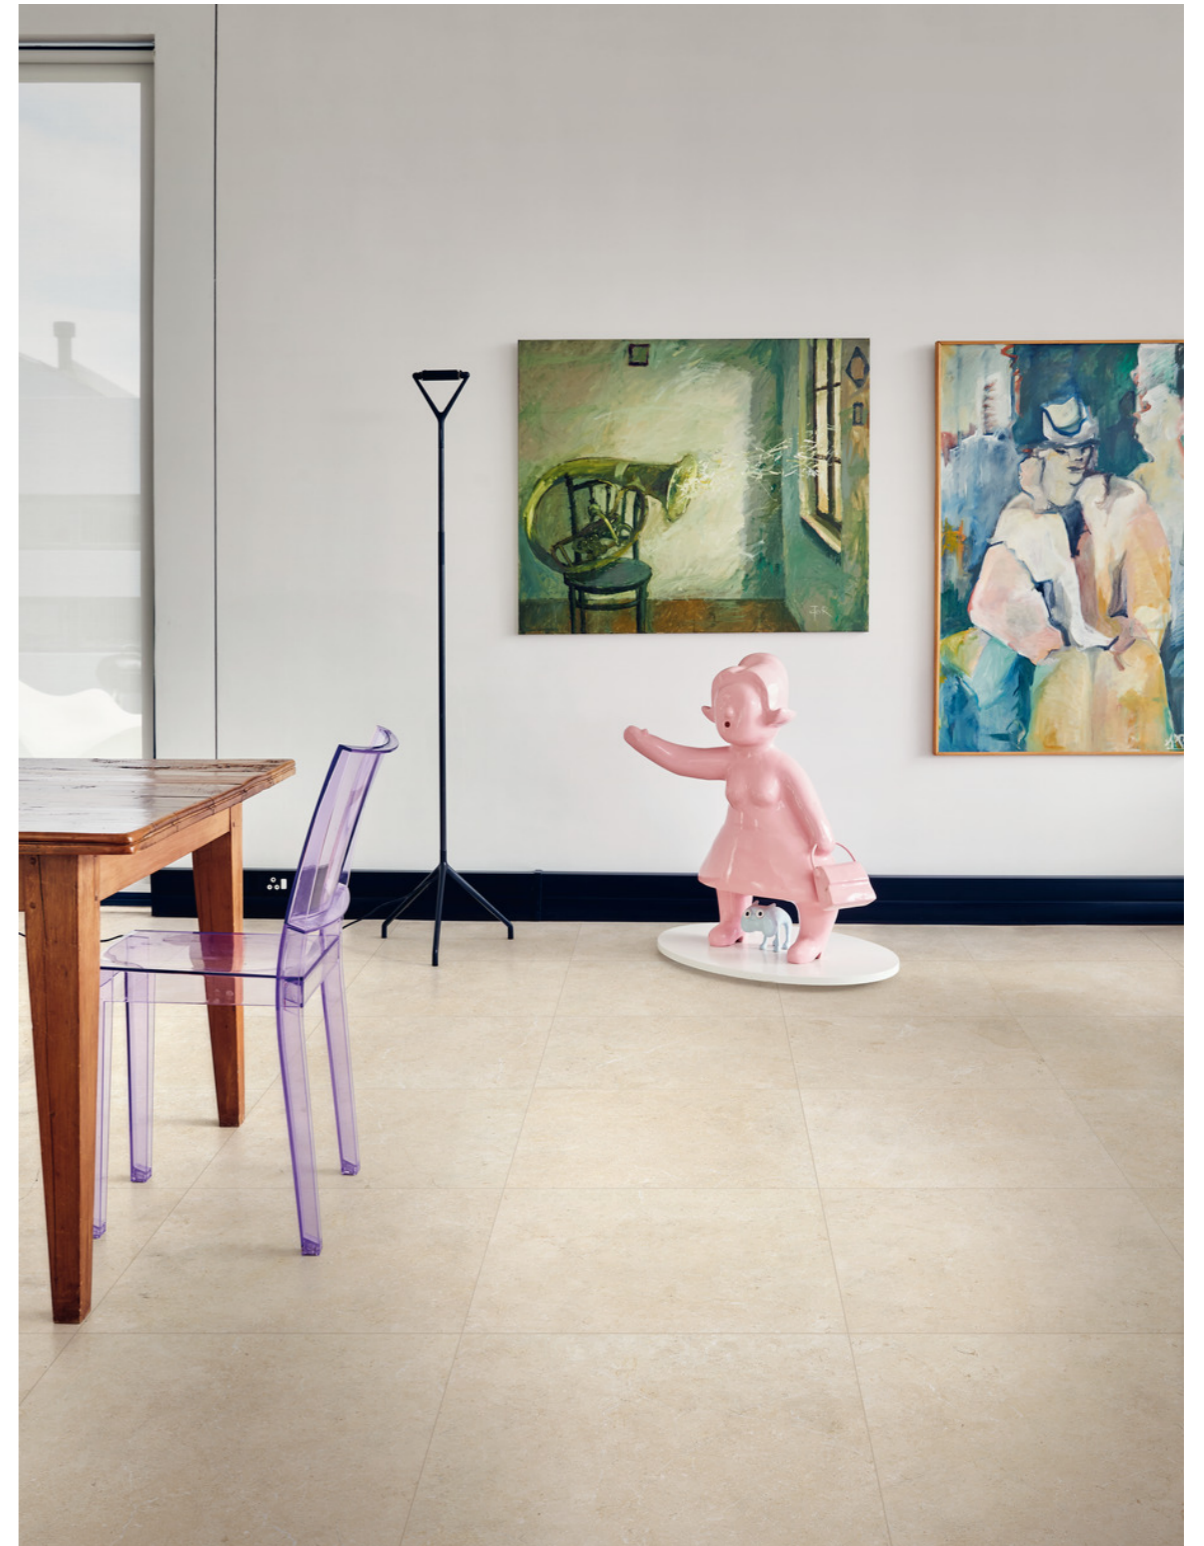

M7EF Limestone Ivory Rt 60x60cm



M8LN Limestone Sand Mosaico Mix 30x30cm
M7F3 Limestone Ivory Velvet 75x75cm
M7EP Limestone Ivory Str 75x75cm



M7EZ Limestone Taupe Velvet 75x75cm





M909 Limestone Taupe Rt 120x120cm



M7E1 Limestone Taupe Rt 75x150cm










Mystone Limestone Index

MLV Mystone Limestone Ivory R10 Rt 160x160cm
MQ7Y Lume Bone Lux 10x10cm
M7FK Mystone Limestone20 Ivory Strutturato Rettificato 80x80cm


Mystone Limestone

- Colorbody Fine Porcelain Stoneware




Ivory

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
75x150cm	Natural	M7E3	Limestone Ivory Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	2,25	45,64	21	47,25	958,42		
75x75cm	Natural	M7E7	Limestone Ivory Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	1,13	22,45	42	47,25	942,93		
60x60cm	Natural	M7EF	Limestone Ivory Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	3	1,08	22,29	40	43,20	891,64		
30x60cm	Natural	M7EK	Limestone Ivory Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	6	1,08	21,79	48	51,84	1.046,01		
75x75cm	Structured Surface	M7EP	Limestone Ivory Str	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	2	1,13	22,40	42	47,25	940,86		
30x60cm	Structured Surface	M7ET	Limestone Ivory Str	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	6	1,08	21,63	48	51,84	1.038,25		
75x150cm	Velvet	M7EX	Limestone Ivory Velvet	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise					G	V2	2	2,25	45,45	21	47,25	954,55		
75x75cm	Velvet	M7F3	Limestone Ivory Velvet	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise					G	V2	2	1,13	22,28	42	47,25	935,83		
120x120cm	Natural	M907	Limestone Ivory Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	1	1,44	30,77	36	51,84	1.107,69		
120x120cm	Structured Surface	M90C	Limestone Ivory Str	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	1	1,44	30,70	36	51,84	1.105,09		
120x120cm	Natural	M9HA	Limestone Ivory Rt 6mm	MM 06	.	Frost proof, Resistance deep abrasion	Floor & Wall	StepWise	R10A > 0.40	Class 1		>= 0.42	H	V2	2	2,88	44,85	20	57,60	897,06		
60x120cm	Natural	M9HE	Limestone Ivory Rt 6mm	MM 06	.	Frost proof, Resistance deep abrasion	Floor & Wall	StepWise	R10A > 0.40	Class 1		>= 0.42	H	V2	3	2,16	32,96	15	32,40	494,43		
60x120cm	Natural	MQ6K	Limestone Ivory Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	1,44	31,54	36	51,84	1.135,60		
160x160cm	Natural	MQLV	Mystone Limestone Ivory R10 Rt	MM 09	.	Frost proof, Resistance deep abrasion	Floor & Wall		R10B > 0.40	Class 1		>= 0.42	H	V2	1	2,56	50,74	18	46,08	913,38		




Sand

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
75x150cm	Natural	M7E2	Limestone Sand Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	2,25	46,21	21	47,25	970,43		
75x75cm	Natural	M7E6	Limestone Sand Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	1,13	21,74	42	47,25	913,04		
60x60cm	Natural	M7EE	Limestone Sand Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	3	1,08	21,66	40	43,20	866,25		
30x60cm	Natural	M7EJ	Limestone Sand Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	6	1,08	21,54	48	51,84	1.034,11		
75x75cm	Structured Surface	M7EN	Limestone Sand Str	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	2	1,13	22,00	42	47,25	923,93		
30x60cm	Structured Surface	M7ES	Limestone Sand Str	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	6	1,08	22,13	48	51,84	1.062,08		
75x150cm	Velvet	M7EW	Limestone Sand Velvet	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise					G	V2	2	2,25	46,66	21	47,25	979,88		
75x75cm	Velvet	M7F2	Limestone Sand Velvet	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise					G	V2	2	1,13	22,34	42	47,25	938,43		
120x120cm	Natural	M908	Limestone Sand Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	1	1,44	31,00	36	51,84	1.116,04		
120x120cm	Structured Surface	M90D	Limestone Sand Str	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	1	1,44	31,20	36	51,84	1.123,29		
120x120cm	Natural	M9HC	Limestone Sand Rt 6mm	MM 06	.	Frost proof, Resistance deep abrasion	Floor & Wall	StepWise	R10A > 0.40	Class 1		>= 0.42	H	V2	2	2,88	44,85	20	57,60	897,06		
60x120cm	Natural	M9HF	Limestone Sand Rt 6mm	MM 06	.	Frost proof, Resistance deep abrasion	Floor & Wall	StepWise	R10A > 0.40	Class 1		>= 0.42	H	V2	3	2,16	34,02	15	32,40	510,24		
60x120cm	Natural	MQ6L	Limestone Sand Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	1,44	29,65	36	51,84	1.067,55		
160x160cm	Natural	MQLU	Mystone Limestone Sand R10 Rt	MM 09	.	Frost proof, Resistance deep abrasion	Floor & Wall		R10B > 0.40	Class 1		>= 0.42	H	V2	1	2,56	51,20	18	46,08	921,60		



Taupe

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
75x150cm	Natural	M7E1	Limestone Taupe Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	2,25	46,31	21	47,25	972,42		
75x75cm	Natural	M7E5	Limestone Taupe Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	2	1,13	22,52	42	47,25	945,95		
60x60cm	Natural	M7E9	Limestone Taupe Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	3	1,08	21,99	40	43,20	879,48		
30x60cm	Natural	M7EH	Limestone Taupe Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	6	1,08	22,10	48	51,84	1.060,77		
75x75cm	Structured Surface	M7EM	Limestone Taupe Str	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	2	1,13	22,71	42	47,25	953,97		
30x60cm	Structured Surface	M7ER	Limestone Taupe Str	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	6	1,08	21,65	48	51,84	1.039,09		
75x150cm	Velvet	M7EV	Limestone Taupe Velvet	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise					G	V2	2	2,25	45,04	21	47,25	945,76		
75x75cm	Velvet	M7EZ	Limestone Taupe Velvet	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise					G	V2	2	1,13	22,29	42	47,25	936,01		
120x120cm	Natural	M909	Limestone Taupe Rt	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R10B > 0.40	Class 2	36+ Slider 96	>= 0.42	H	V2	1	1,44	31,05	36	51,84	1.117,72		
120x120cm	Structured Surface	M90E	Limestone Taupe Str	MM 9,5	.	Frost proof, Resistance deep abrasion	Floor & Wall	High Performance, StepWise	R11C > 0.40	Class 3	36+ Slider 96	>= 0.42	H	V2	1	1,44	31,06	36	51,84	1.118,21		



Mosaico 5x5 Sand

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
30x30cm	Natural	M8HQ	Limestone Sand Mosaico 5x5 Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,36	8,00	60	21,60	480,00



Mosaico Foglie Sand

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
34,2x38cm	Natural	M8LS	Limestone Sand Mosaico Foglie	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,52	10,00	60	31,19	600,00
34,2x38cm	Natural	M8LT	Limestone Taupe Mosaico Foglie	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,52	10,00	60	31,19	600,00



Mosaico Mix Sand

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
30,5x30cm	Natural	M8LN	Limestone Sand Mosaico Mix	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,37	8,00	60	21,96	480,00




Mosaico 5x5 Ivory

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
30x30cm	Natural	M8HN	Limestone Ivory Mosaico 5x5 Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,36	8,00	60	21,60	480,00



Mosaico Foglie Ivory

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
34,2x38cm	Natural	M8LR	Limestone Ivory Mosaico Foglie	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,52	10,00	60	31,19	600,00



Mosaico 5x5 Taupe

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
30x30cm	Natural	M8HR	Limestone Taupe Mosaico 5x5 Rt	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,36	8,00	60	21,60	480,00



Mosaico Mix Taupe

Formato	Superfici	Codice	Descrizione	Spessore	Rett.	Caratteristiche tecniche	Utilizzo	Premium Tech	R	BCR	Pendulum Class	Pend. PTV >36	Australian pendulum	DCOF	Destinazioni d'uso	V	Pezzi per scatola	Mq	Kg	Scatole per pallet	Mq	Kg
30,5x30cm	Natural	M8LP	Limestone Taupe Mosaico Mix	MM 10	.	Frost proof, Resistance deep abrasion	Floor & Wall									V2	4	0,37	8,00	60	21,96	480,00

Legenda

Destinazioni d'uso

D
Tiles suitable only for residential bathrooms and bedrooms; any type of abrasion must be avoided.

E
Tiles suitable for any room of a house except for entrance areas and kitchens. Low stress abrasive wear.

F
Tiles suitable for any room of a house without direct access from the outside or access not protected by doormats. Average stress abrasive wear.

G
Materials suitable for rooms subject to medium-heavy abrasion, such as detached houses and light-traffic commercial buildings.

H
Materials suitable for situations of relatively hard abrasion in environments without protection against scratching, both public and private.

Variazioni cromatiche

V0
Monochromatic - V0: tiles of the same shade are very uniform, in just one colour

V1
Uniform appearance - V1: uniform colour with only minimal differences between tiles in the same production run

V2
Slight variation - V2: clearly distinguishable differences in texture and pattern within the same production run

V3
Moderate variation - V3: significant variation in texture, pattern and colour from tile to tile within the same production run. The colour range should be viewed before selecting the material

V4
Substantial/random variation - V4: random differences from tile to tile. One tile may have totally different texture and colour from another. The colour range should be viewed before selecting the material

Certificazioni



ISO 14001



ISO 50001



ISO 45001



ISO 9001



Green Building Council



GPP



EPD Italy



ISO 17889-1



Recycled Material



Greenguard Certification



LEED Credits



QBUPEC



QBUPEC D+



FDES



Declare



HPD



CAM Sassuolo



CAM Casiglie



CCC



CAM Fiorano



CE 001MRZI



CE 009MRZI



UKCA 001MRZUK



UKCA 009MRZUK



SASO

© Copyright by Marazzi Group S.r.l., 2023.
All rights reserved, Marazzi Group Srl a Socio Unico
Viale Regina Pacis, 39 41049 Sassuolo (MO) Italy
T +39 0536 860800 F +39 0536 860644
info@marazzi.it www.marazzi.it

La riproduzione dei colori è approssimativa. Le tabelle con i dati riferiti ai contenuti per scatole ed ai pesi degli imballi sono aggiornate al momento della stampa del catalogo, pertanto i dati elencati possono subire variazioni.

Marazzi Group ha la facoltà esclusiva di modificare e sostituire, anche solo parzialmente i componenti dei sistemi illustrati in questo folder, senza l'obbligo di darne preavviso.



MARAZZI